

A better environment inside and out.™

Safety & Security Window Films

# Armorcoat® 4 Mil Stainless Steel 35

## Performance results


	4mm single	4mm double
Solar energy		
% Transmittance	41	33
% Absorptance	47	50
% Reflectance	13	16
Visible light		
% Transmittance	44	40
% Reflectance exterior	15	21
% Reflectance interior	13	14
Emissivity	.84	.84
Winter U-Factor (W/m <sup>2</sup> °C)	5.80	2.85
Shading coefficient	.67	.69
Solar heat gain coefficient	.58	.60
Solar selectivity index – luminous efficacy (VLT/SC)	.67	.58
Light to solar heat gain factor (VLT/SHGC)	.77	.67
% Ultraviolet light blocked (@ 300 to 380 nm)	>99	>99
% Total solar energy rejected	42	40
% Summer solar heat gain reduction	32	20
% Glare reduction	51	50

## Physical properties nominal

Gauge	100 microns
Peel strength	985 g/cm
Tensile strength	2,110 kg/cm <sup>2</sup>
Break strength	22 kg/cm
ASTM D4830 puncture test	32 kg

## Film performance

Performance results were generated from testing 4mm thick clear glass.

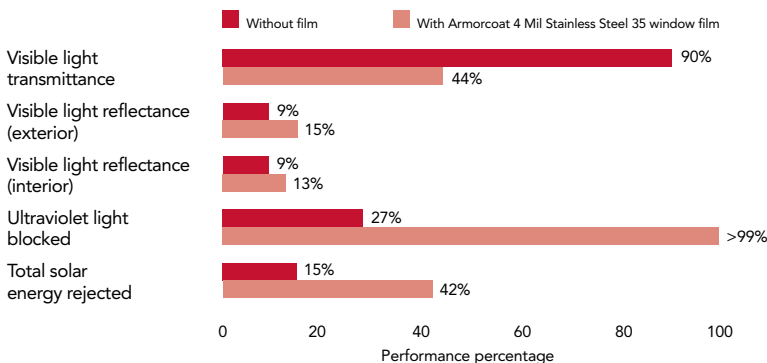

All performance results are based on the film installed on the inside surface of 4mm and 4mm+4mm thick, clear glass

### Notes

1. Performance results were generated using LBNL Window 5.2, and calculated and reported in accordance with CEN and AIMCAL standards. Performance results are subject to variations within industry standards.
2. These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Bekaert's limited warranty should be carefully reviewed prior to purchasing any Bekaert product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Bekaert shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Bekaert has no control.
3. Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

[www.solargard.com](http://www.solargard.com)