

DATASHEET

SOLARTEK LOW ECO 70

PRODUCT SPECIFICATION

RANGE: **LOW ECO 70**

VARIANT: **LIGHT/MEDIUM**

SHADING COEFFICIENT: **0.56**

U FACTOR (SINGLE GLAZING): **3.45**

U FACTOR (DOUBLE GLAZING): **1.93**

EMISSIVITY: **0.09**

FILM COLOUR: **VIRTUALLY CLEAR**



FEATURES & BENEFITS

Designed for maximum insulation in winter whilst transmitting maximum light.

High-end spectrally selective, elegant with a barely visible appearance.


Extremely low interior & external reflectivity.

Great solar heat & UV rejection, fade & corrosion resistant with an exclusive Manufacturers's Warranty

Turns single glazing into double glazing & double glazing into triple glazing.

Stay cooler by reducing excessive heat in warmer months.

% MAY CHANGE SLIGHTLY
DEPENDING ON GLASS TYPE

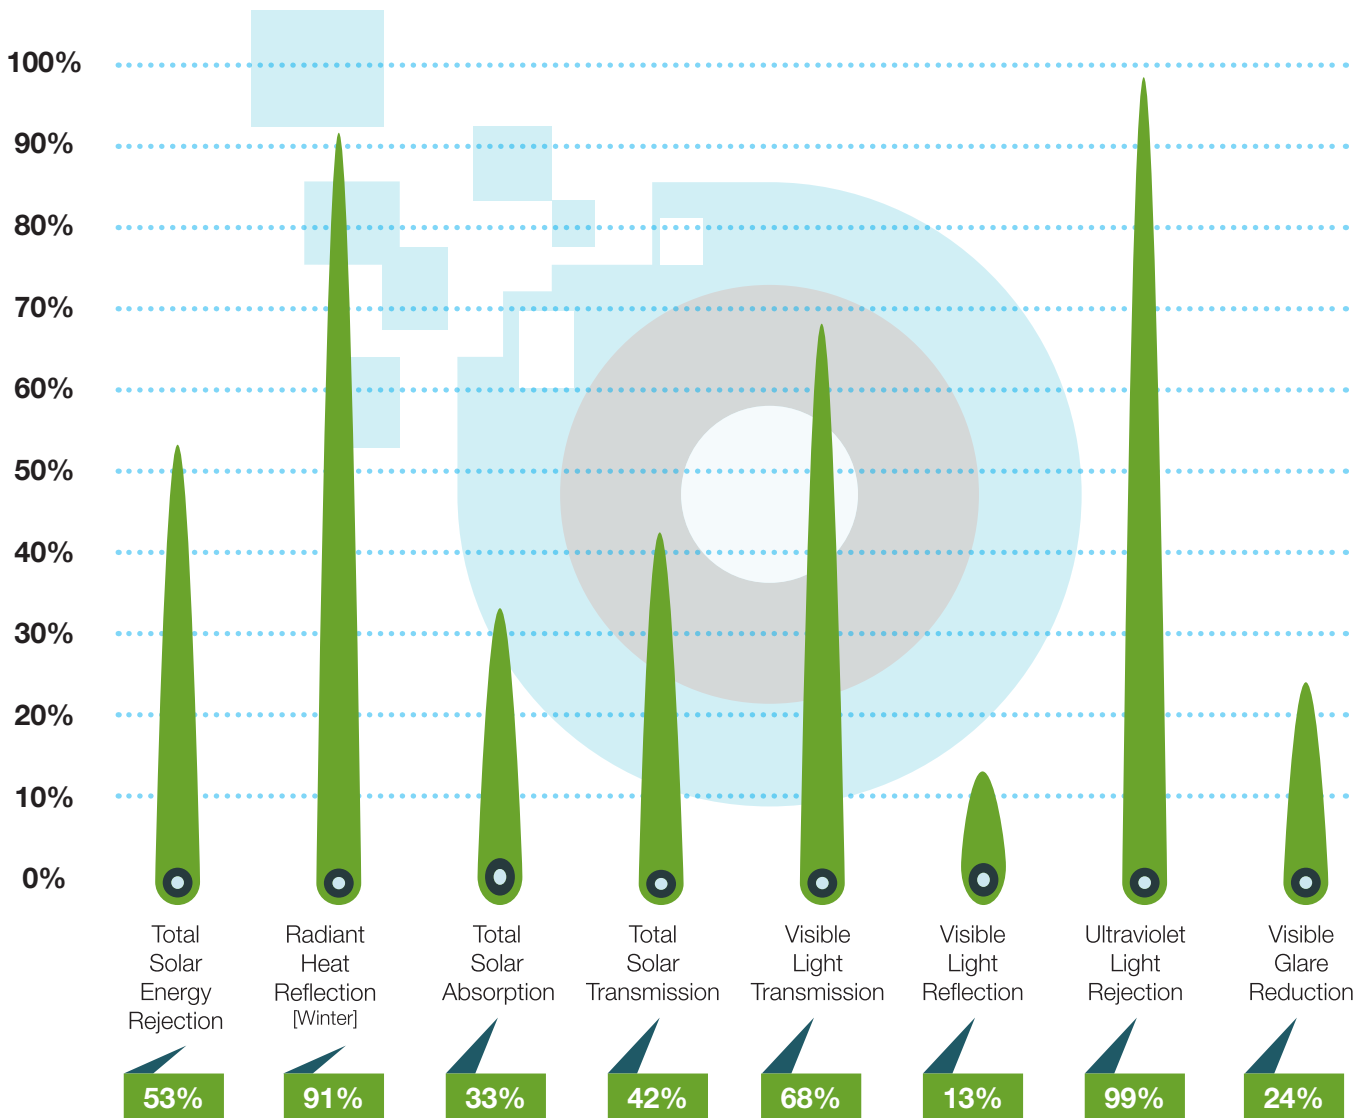

WWW.SOLARTEKFILMS.COM

INFO@SOLARTEKFILMS.COM

CALL NOW: 08000 15 18 15

SOLARTEK FILMS LTD, 42B HIGH STREET, WARE, HERTS, SG12 9BY